


We BRIGHTEN Your BRANDS

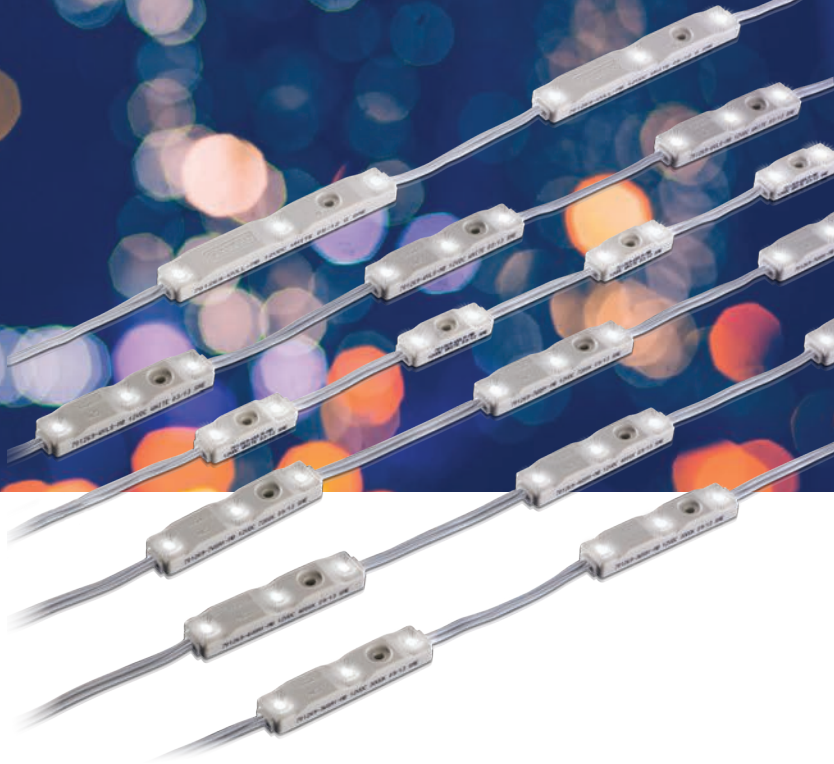

VL Plus 2 Whites

Everyday standard face lit solutions

- VL Plus 2 is 25% brighter than VL Plus
- **NEW** VL Plus 2 HB Short is 28% brighter than VL Plus 2 Short
- Short available in 5 shades of white
- Constant Current Technology (CCT)

SPECIFICATIONS

Part number	Long.....	6500 K	701269-6WLA2-MB
	Short.....	7200 K	701269-7WSA2-MB
		6500 K	701269-6WSA2-MB
		5000 K	701269-5WSA2-MB
		4000 K	701269-4WSA2-MB
		3000 K	701269-3WSA2-MB
	HB Short	6500 K	701269-6WHA1-MB
	Mini.....	6500 K	701269-6WMA2-MB

Dimensions L × W × H	Long.....	88 mm × 13 mm × 9 mm
	Short.....	60 mm × 13 mm × 9 mm
	Mini.....	34 mm × 11 mm × 9 mm

Viewing angle..... 120°

LEDs per module	Long/Short.....	3
	Mini.....	2

Modules per meter	Long.....	6.5
	Short.....	8
	Mini.....	13

Operating temperature..... -40° C to +70° C

Protection class..... IP66

Power per module	Long/Short	0.54 W
	Mini.....	0.42 W

Efficacy	Long/Short	93 lm/W
	HB Short	119 lm/W
	Mini.....	60 lm/W

Power capacity	Per SloanLED 60 W 12 VDC power supply:	
	Long/short.....	100 modules
	Mini.....	128 modules

Fastening..... Peel-n-stick and mechanical

Packaging	5 trays per carton	
	Long.....	50 modules per tray
	Short.....	75 modules per tray
	Mini.....	100 modules per tray

Size	Color temperature	Part number	Lumens per module (nominal)
Long	6500 K	701269-6WLA2-MB	50
	7200 K	701269-7WSA2-MB	50
Short	6500 K	701269-6WSA2-MB	50
	5000 K	701269-5WSA2-MB	50
	4000 K	701269-4WSA2-MB	50
	3000 K	701269-3WSA2-MB	50
HB Short	6500 K	701269-6WHA1-MB	64
Mini	6500 K	701269-6WMA2-MB	25



SloanLED channel letter products are covered by US and foreign patents pending and covered by one or more of the following US patents issued: 6,932,495, 7,160,140, 7,241,031, 7,520,771, 7,931,386 and European Patent No. 1756471

SloanLED Headquarters
5725 Olivas Park Drive • Ventura, California 93003
805.676.3200 • info@SloanLED.com

SloanLED Europe b.v.
Overslagweg 7 • 2645 EK Delfgauw • The Netherlands
+31 88 12 44 900 • Europe@SloanLED.com

SloanLED.com

© 2016 SloanLED Rev C 2016-03-29

